


The MCS202K series is a family of high-bandwidth, high-speed response, and low-noise current sensor integrated chips for a wide range of applications including automotive, industrial, consumer, and communication systems, providing a high-speed, high-bandwidth integrated solution for current sensing in AC, DC, and inverter high-frequency switching power supplies. The chip family is available in a variety of output modes.

### ***Features and Benefits***


- Open-loop current sensor using Hall effect IC
- Single 5V supply
- Support unidirectional, bidirectional output,  
BW 400KHz,response time 1uS
- Analog signal output
- Primary side measurement Current range:  $\pm 20A - \pm 75A$
- Operating temperature range :  $-40^{\circ}C$  to  $+125^{\circ}C$
- Zero current output Voltage :  
 $-xR$  : bias QVO and Power supply voltage  $V_{CC}$  equal ratio output ,  
ratio Gain  $V_{QVO}=V_{CC}/2$  or  $V_{CC}/10$
- Differential Hall sensor, good accuracy, linearity and temperature drift
- Low internal resistance to control power consumption effectively
- Comply with AECQ100

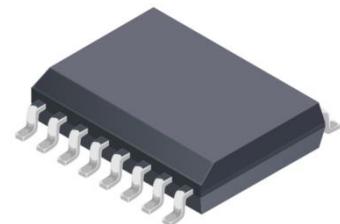

### ***Application***

- EV/HEV charger and DC-DC power supply
- Photovoltaic inverter power supply and UPS
- Moto control and frequency converters
- Switching power supplies


## Typical Application Circuit

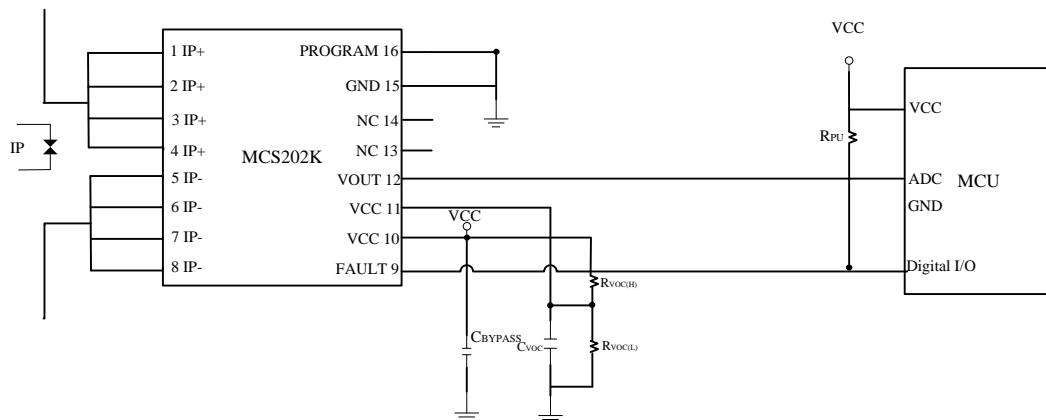

\*Vcc BYPASS capacitor must be close to device Vcc pin of the sensor.


\*Vout BYPASS capacitor must be close to device Vout pin of the sensor.

## Pin diagram

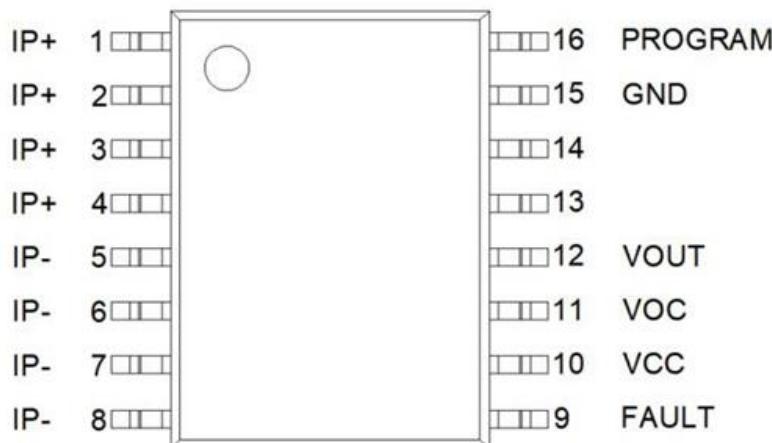

| Pin number | name    | description                                    |
|------------|---------|--|
| 1,2,3,4    | IP+     | Detected current positive (in)                 |
| 5,6,7,8    | IP-     | Negative end detected current(out)             |
| 9          | FAULT   | Over current fault output                      |
| 10         | VCC     | Power supply                                   |
| 11         | VOC     | Over current threshold setting pin             |
| 12         | VOUT    | analog output                                  |
| 13,14      |         | unoccupied                                     |
| 15         | GND     | Grounding                                      |
| 16         | PROGRAM | Factory calibrated feet (grounded recommended) |

### *Ordering Information*

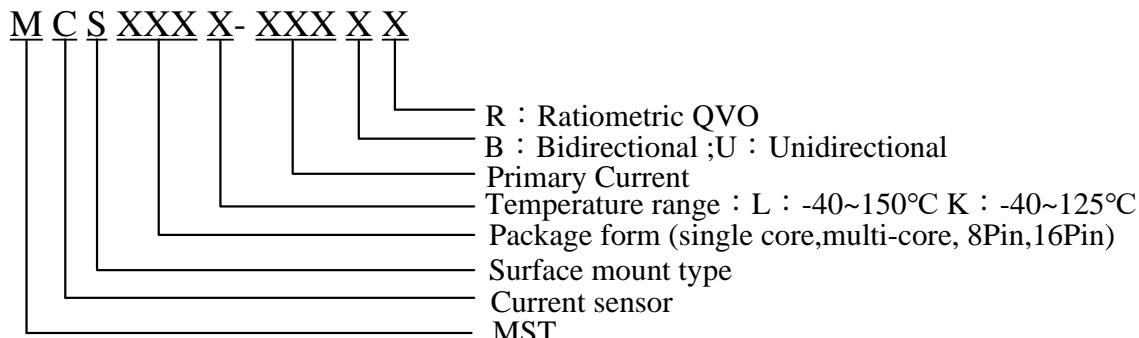

| Part Number   | QVO<br>V <sub>OUT(Q)</sub><br>(V) | Primary<br>Current I <sub>P</sub><br>(A) | Sensitivity<br>Sens <sub>(Typ.)</sub><br>(mV/A) | TA<br>(°C) | MPQ<br>(PCS) |
|---------------|-----------------------------------|--|---|------------|--------------|
| MCS202K-020BR | V <sub>CC</sub> /2                | ±20                                      | 100   | -40~125    | 440          |
| MCS202K-020UR | V <sub>CC</sub> /10               | 20                                       | 200   | -40~125    | 440          |
| MCS202K-040BR | V <sub>CC</sub> /2                | ±40                                      | 50  | -40~125    | 440          |
| MCS202K-040UR | V <sub>CC</sub> /10               | 40                                       | 100   | -40~125    | 440          |
| MCS202K-065BR | V <sub>CC</sub> /2                | ±65                                      | 30.8  | -40~125    | 440          |
| MCS202K-065UR | V <sub>CC</sub> /10               | 65                                       | 61.5  | -40~125    | 440          |
| MCS202K-075BR | V <sub>CC</sub> /2                | ±75                                      | 26.7  | -40~125    | 440          |
| MCS202K-075UR | V <sub>CC</sub> /10               | 75                                       | 53.3  | -40~125    | 440          |

\*Please contact factory for currents other than standard current specifications

**Absolute Maximum Ratings**

| Characteristic                       | Symbol                           | Rating                        | Unit |
|--------------------------------------|----------------------------------|-------------------------------|------|
| Supply Voltage                       | V <sub>CC</sub>                  | -0.3 to 6.5                   | V    |
| Supply Current                       | I <sub>CC</sub>                  | 20                            | mA   |
| Output Voltage/<br>Reference voltage | V <sub>OUT/V<sub>REF</sub></sub> | 0.15 to V <sub>CC</sub> -0.15 | V    |
| Output Current                       | I <sub>OUT</sub>                 | ±40                           | mA   |
| Operating Temperature                | T <sub>A</sub>                   | -40 to 125                    | °C   |
| Max Junction<br>Temperature          | T <sub>J</sub>                   | 165                           | °C   |
| Storage Temperature                  | T <sub>S</sub>                   | -55 to 150                    | °C   |

**Electronical Specifications**

Dc operating parameters at V<sub>CC</sub> = 5.0V (unless otherwise stated), TA within the specified temperature range.

| Parameter                               | Symbol                             | Condition  | Min                   | Typ.                | Max  | Unit |  |
|---|------------------------------------|--|-----------------------|---------------------|------|------|--|
| Supply Voltage                          | V <sub>CC</sub>                    |  | 4.75                  | 5.0                 | 5.25 | V    |  |
| Supply Current                          | I <sub>CC</sub>                    | R <sub>L</sub> ≥ 10KΩ  |                       | 16                  |      | mA   |  |
| Power on Delay                          | T <sub>PO</sub>                    | T <sub>A</sub> =25°C   |                       |                     | 1000 | μs   |  |
| QVO Ratiometric<br>Error (-R)           | E <sub>r</sub>                     |  | -0.3                  |                     | 0.3  | %    |  |
| Zero Current Output<br>Voltage          | V <sub>QVO</sub>                   | MCS-xxxBR-3  | T <sub>A</sub> = 25°C | V <sub>CC</sub> /2  |      | V    |  |
|   |                                    | MCS-xxxUR-3  |                       | V <sub>CC</sub> /10 |      |      |  |
| Output voltage Range<br>@I <sub>P</sub> | V <sub>OUT</sub> -V <sub>QVO</sub> | MCS-xxxBR-3  |                       | ±2                  |      |      |  |
|   |                                    | MCS-xxxUR-3  |                       | 4                   |      |      |  |
| Output Load<br>Resistance               | R <sub>L</sub>                     | V <sub>OUT</sub> to V <sub>CC</sub> or GND   | 5                     |                     |      | KΩ   |  |
| Output Load<br>Capacitance              | C <sub>L</sub>                     | V <sub>OUT</sub> TO GND  |                       |                     | 10   | nF   |  |
| Response Time                           | t <sub>RESPONSE</sub>              | T <sub>A</sub> =25°C, C <sub>L</sub> =1nF, I <sub>P</sub> step=50% of I <sub>P+</sub> ,<br>90% input to 90% output |                       | 1                   |      | μs   |  |
| Internal Bandwidth                      | BW                                 | Small signal -3dB, C <sub>L</sub> =1nF, T <sub>A</sub> =25°C   |                       | 0.4                 | 1    | MHz  |  |
| DC Output Impedance                     | R <sub>OUT</sub>                   | T <sub>A</sub> = 25°C  |                       |                     | 20   | KΩ   |  |

### **Isolation Characteristics**

| Characteristic                      | Symbol            | Notes  | Rating | Unit                   |
|-------------------------------------|-------------------|--|--------|------------------------|
| Dielectric Strength Test Voltage    | V <sub>ISO</sub>  | Agency type-tested for 60 seconds per UL standard 60950-1, 2nd Edition | 3600   | VAC                    |
| Working Voltage for Basic Isolation | V <sub>WFSI</sub> | According to UL Standard 60950-1 2nd Edition, Basic (Single) Isolation | 870    | VDC or V <sub>pk</sub> |
|                                     |                   |  | 616    | V <sub>rms</sub>       |
| Creepage distance                   | DCR               | Minimum distance from IP pin to signal pin (plastic body)              | 7.5    | mm                     |

\*1 : 60-second test is only for UL test; Tested in production against UL60950-1 2nd Edition

### **Overcurrent fault characteristics**


| Characteristic           | Symbol                      | Test Conditions   | Min.                | Typ. | Max.              | Unit |
|--------------------------|-----------------------------|---|---------------------|------|-------------------|------|
| FAULT Response Time      | t <sub>RESPONSE(F)</sub>    | From I <sub>p</sub> >I <sub>FAULT</sub> to FAULT, The time when the pin is pulled below V <sub>FAULT</sub> ; The input current jumps from 0 to 1.2xI <sub>FAULT</sub> |                     | 0.8  | 1                 | μs   |
| FAULT Range [3]          | I <sub>FAULT</sub>          | Relative to I <sub>PR</sub> full-scale; set via VOC pin   | 0.5*I <sub>PR</sub> | -    | 2*I <sub>PR</sub> | A    |
| FAULT Output Low Voltage | V <sub>FAULT</sub>          | In fault condition; RF(PULLUP) = 5 kΩ   | -                   | 0.07 | 0.4               | V    |
| FAULT Pull-Up Resistance | RF(PULLUP)=R <sub>PU</sub>  |   | 1                   | -    | 10                | kΩ   |
| FAULT Leakage Current    | I <sub>FAULT(LEAKAGE)</sub> |   | -                   | ±5   | -                 | uA   |
| FAULT Hysteresis[1]      | I <sub>HYST</sub>           | Vcc=5V  |                     | 6    |                   | %FS  |
|                          |                             | Vcc=3.3V  | -                   | 9    | -                 |      |
| FAULT Error[2]           | E <sub>FAULT</sub>          | Tested at V <sub>VOC</sub> =0.2×Vcc (I <sub>FAULT</sub> threshold=100%×I <sub>PR</sub> )  | -                   | ±5   | -                 | %    |
| VOC Input Range          | V <sub>VOC</sub>            |   | 0.1xVcc             |      | 0.4xVcc           | V    |
|                          |                             | Vcc=5V  | 0.5                 | -    | 2                 |      |
|                          |                             | Vcc=3.3V  | 0.33                | -    | 1.32              |      |
| VOC Input Current        | I <sub>VOC</sub>            |   | -                   | 10   | 100               | nA   |

[1] After Vout is higher than Vout(FAULT), the internal comparator trips, Vout must be lower than Vout(FAULT)-VoutHYST, must be lower than.


[2] A failure error is defined as the value of the reported failure relative to the required threshold of Vout(FAULT).

[3]


|          | V <sub>VOC</sub> (V) |        | Fault Operation Point %FS |
|----------|----------------------|--------|---------------------------|
|          | Vcc=3.3V             | Vcc=5V |                           |
| 0.1xVcc  | 0.33                 | 0.5    | 50%                       |
| 0.15xVcc | 0.466                | 0.75   | 75%                       |
| 0.2xVcc  | 0.661                | 1      | 100%                      |
| 0.25xVcc | 0.826                | 1.25   | 125%                      |
| 0.3xVcc  | 0.991                | 1.5    | 150%                      |
| 0.35xVcc | 1.156                | 1.75   | 175%                      |
| 0.4xVcc  | 1.321                | 2      | 200%                      |

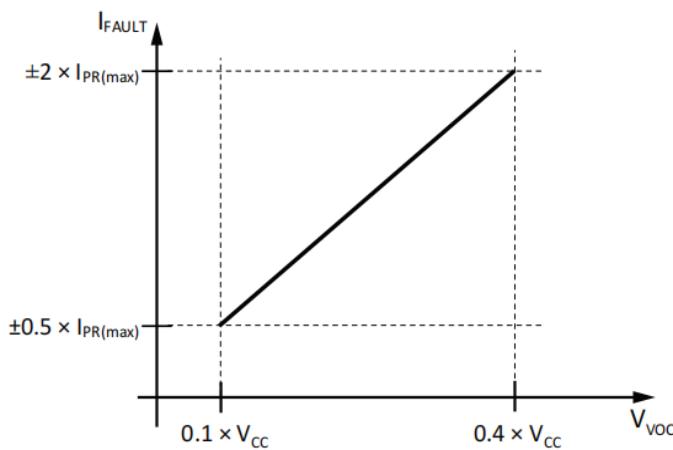

**Figure 4: Fault Threshold vs.  $V_{VOC}$**

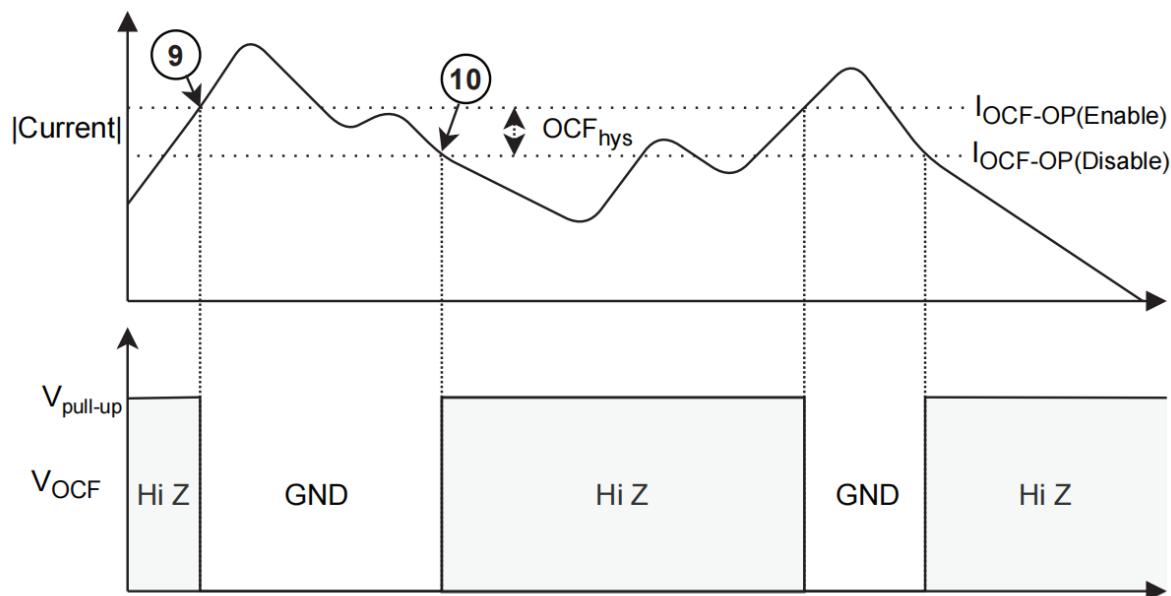

[4]The VOC can be connected to an external voltage source.

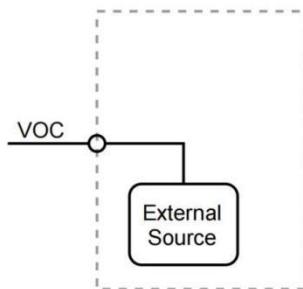

## 020BR Performance Characteristics

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $T_A = -40^\circ C \sim 125^\circ C$ , unless otherwise specified

| Parameter                   | Symbol        | Condition  | Min  | Typ.       | Max | Unit |
|-----------------------------|---------------|--|------|------------|-----|------|
| <b>Nominal parameters</b>   |               |  |      |            |     |      |
| Current Sensing Range       | $I_P$         |  | -20  |            | 20  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$                                      |      | 100        |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$   |      | $V_{CC}/2$ |     | V    |
| <b>Accuracy Performance</b> |               |  |      |            |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^\circ C; V_{CC}=5.0V$                      | -1   |            | 1   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^\circ C$                             | -10  | $\pm 5$    | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^\circ C \sim 125^\circ C$           | -30  | $\pm 15$   | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang   | -1   | 0.5        | 1   | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^\circ C \sim 125^\circ C$ | -2   |            | 2   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^\circ C \sim 85^\circ C$  | -1.5 |            | 1.5 | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P, T_A=-40^\circ C \sim 25^\circ C$ |      | $\pm 3$    |     | %    |

## 020UR Performance Characteristics

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $TA = -40^{\circ}C \sim 125^{\circ}C$ , unless otherwise specified

| Parameter                   | Symbol        | Condition  | Min  | Typ.        | Max | Unit |
|-----------------------------|---------------|--|------|-------------|-----|------|
| <b>Nominal parameters</b>   |               |  |      |             |     |      |
| Current Sensing Range       | $I_P$         |  | 0    |             | 20  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$  |      | 200         |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$   |      | $V_{CC}/10$ |     | V    |
| <b>Accuracy Performance</b> |               |  |      |             |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^{\circ}C; V_{CC}=5.0V$                       | -1   |             | 1   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^{\circ}C$                              | -10  | $\pm 5$     | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$           | -30  | $\pm 15$    | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang   | -1   | 0.5         | 1   | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$ | -2   |             | 2   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$  | -1.5 |             | 1.5 | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$ |      | $\pm 3$     |     | %    |

## 040BR Performance Characteristics

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $TA = -40^{\circ}C \sim 125^{\circ}C$ , unless otherwise specified

| Parameter                   | Symbol        | Condition  | Min  | Typ.       | Max | Unit |
|-----------------------------|---------------|--|------|------------|-----|------|
| <b>Nominal parameters</b>   |               |  |      |            |     |      |
| Current Sensing Range       | $I_P$         |  | -40  |            | 40  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$  |      | 50         |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$   |      | $V_{CC}/2$ |     | V    |
| <b>Accuracy Performance</b> |               |  |      |            |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^{\circ}C; V_{CC}=5.0V$                       | -1   |            | 1   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^{\circ}C$                              | -10  | $\pm 5$    | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$           | -30  | $\pm 15$   | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang   | -1   | 0.5        | 1   | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$ | -2   |            | 2   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$  | -1.5 |            | 1.5 | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$ |      | $\pm 3$    |     | %    |

## **040UR Performance Characteristics**

Dc operating parameters at VCC = 5.0V , TA=-40°C ~125°C,unless otherwise specified

| Parameter                   | Symbol               | Condition   | Min  | Typ.                | Max | Unit |
|-----------------------------|----------------------|---|------|---------------------|-----|------|
| <b>Nominal parameters</b>   |                      |   |      |                     |     |      |
| Current Sensing Range       | I <sub>P</sub>       |   | 0    |                     | 40  | A    |
| Sensitivity                 | Sens <sub>TA</sub>   | @V <sub>CC</sub> =5.0V                                    |      | 100                 |     | mV/A |
| Zero-current output voltage | V <sub>QVO</sub>     | I <sub>P</sub> =0A  |      | V <sub>CC</sub> /10 |     | V    |
| <b>Accuracy Performance</b> |                      |   |      |                     |     |      |
| Sensitivity Error           | E <sub>Sens</sub>    | @T <sub>A</sub> =25°C;V <sub>CC</sub> =5.0V               | -1   |                     | 1   | %    |
| Electrical Offset Error     | V <sub>OE</sub>      | I <sub>P</sub> =0A, T <sub>A</sub> =25°C                  | -10  | ±5                  | 10  | mV   |
|                             |                      | I <sub>P</sub> =0A, T <sub>A</sub> =-40°C ~125°C          | -30  | ±15                 | 30  | mV   |
| Linearity Error             | Lin <sub>ERR</sub>   | Of full rang  | -1   | 0.5                 | 1   | %    |
| Total Output Error          | E <sub>TOT(HT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =25°C~125°C | -2   |                     | 2   | %    |
|                             | E <sub>TOT(HT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =25°C~85°C  | -1.5 |                     | 1.5 | %    |
|                             | E <sub>TOT(LT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =-40°C~25°C |      | ±3                  |     | %    |

## **065BR Performance Characteristics**

Dc operating parameters at VCC = 5.0V , TA=-40°C ~125°C,unless otherwise specified

| Parameter                   | Symbol               | Condition   | Min  | Typ.               | Max | Unit |
|-----------------------------|----------------------|---|------|--------------------|-----|------|
| <b>Nominal parameters</b>   |                      |   |      |                    |     |      |
| Current Sensing Range       | I <sub>P</sub>       |   | -65  |                    | 65  | A    |
| Sensitivity                 | Sens <sub>TA</sub>   | @V <sub>CC</sub> =3.3V                                    |      | 30.8               |     | mV/A |
| Zero-current output voltage | V <sub>QVO</sub>     | I <sub>P</sub> =0A  |      | V <sub>CC</sub> /2 |     | V    |
| <b>Accuracy Performance</b> |                      |   |      |                    |     |      |
| Sensitivity Error           | E <sub>Sens</sub>    | @T <sub>A</sub> =25°C;V <sub>CC</sub> =3.3V               | -1   |                    | 1   | %    |
| Electrical Offset Error     | V <sub>OE</sub>      | I <sub>P</sub> =0A, T <sub>A</sub> =25°C                  | -10  | ±5                 | 10  | mV   |
|                             |                      | I <sub>P</sub> =0A, T <sub>A</sub> =-40°C ~125°C          | -30  | ±15                | 30  | mV   |
| Linearity Error             | Lin <sub>ERR</sub>   | Of full rang  | -1   | 0.5                | 1   | %    |
| Total Output Error          | E <sub>TOT(HT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =25°C~125°C | -2   |                    | 2   | %    |
|                             | E <sub>TOT(HT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =25°C~85°C  | -1.5 |                    | 1.5 | %    |
|                             | E <sub>TOT(LT)</sub> | Full scale of I <sub>P</sub> , T <sub>A</sub> =-40°C~25°C |      | ±3                 |     | %    |

## **065UR Performance Characteristics**

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $TA = -40^{\circ}C \sim 125^{\circ}C$ , unless otherwise specified

| Parameter                   | Symbol        | Condition   | Min  | Typ.        | Max | Unit |
|-----------------------------|---------------|---|------|-------------|-----|------|
| <b>Nominal parameters</b>   |               |   |      |             |     |      |
| Current Sensing Range       | $I_P$         |   | 0    |             | 65  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$   |      | 61.5        |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$  |      | $V_{CC}/10$ |     | V    |
| <b>Accuracy Performance</b> |               |   |      |             |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^{\circ}C; V_{CC}=5.0V$                          | -1   |             | 1   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^{\circ}C$                                 | -10  | $\pm 5$     | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$              | -30  | $\pm 15$    | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang  | -1   | 0.5         | 1   | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P$ , $T_A=25^{\circ}C \sim 125^{\circ}C$ | -2   |             | 2   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P$ , $T_A=25^{\circ}C \sim 85^{\circ}C$  | -1.5 |             | 1.5 | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P$ , $T_A=-40^{\circ}C \sim 25^{\circ}C$ |      | $\pm 3$     |     | %    |

## **075BR Performance Characteristics**

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $TA = -40^{\circ}C \sim 125^{\circ}C$ , unless otherwise specified


| Parameter                   | Symbol        | Condition   | Min  | Typ.       | Max | Unit |
|-----------------------------|---------------|---|------|------------|-----|------|
| <b>Nominal parameters</b>   |               |   |      |            |     |      |
| Current Sensing Range       | $I_P$         |   | -75  |            | 75  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$   |      | 26.7       |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$  |      | $V_{CC}/2$ |     | V    |
| <b>Accuracy Performance</b> |               |   |      |            |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^{\circ}C; V_{CC}=5.0V$                          | -2   |            | 2   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^{\circ}C$                                 | -10  | $\pm 5$    | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$              | -30  | $\pm 15$   | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang  | -1.5 | 0.5        | 1.5 | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P$ , $T_A=25^{\circ}C \sim 125^{\circ}C$ | -3   |            | 3   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P$ , $T_A=25^{\circ}C \sim 85^{\circ}C$  | -2   |            | 2   | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P$ , $T_A=-40^{\circ}C \sim 25^{\circ}C$ |      | $\pm 3$    |     | %    |

## 075UR Performance Characteristics

Dc operating parameters at  $V_{CC} = 5.0V$ ,  $TA = -40^{\circ}C \sim 125^{\circ}C$ , unless otherwise specified

| Parameter                   | Symbol        | Condition  | Min  | Typ.        | Max | Unit |
|-----------------------------|---------------|--|------|-------------|-----|------|
| <b>Nominal parameters</b>   |               |  |      |             |     |      |
| Current Sensing Range       | $I_P$         |  | 0    |             | 75  | A    |
| Sensitivity                 | $Sens_{TA}$   | @ $V_{CC}=5.0V$  |      | 53.3        |     | mV/A |
| Zero-current output voltage | $V_{QVO}$     | $I_P=0A$   |      | $V_{CC}/10$ |     | V    |
| <b>Accuracy Performance</b> |               |  |      |             |     |      |
| Sensitivity Error           | $E_{Sens}$    | @ $T_A=25^{\circ}C; V_{CC}=5.0V$                       | -2   |             | 2   | %    |
| Electrical Offset Error     | $V_{OE}$      | $I_P=0A, T_A=25^{\circ}C$                              | -10  | $\pm 5$     | 10  | mV   |
|                             |               | $I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$           | -30  | $\pm 15$    | 30  | mV   |
| Linearity Error             | $Lin_{ERR}$   | Of full rang   | -1.5 | 0.5         | 1.5 | %    |
| Total Output Error          | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$ | -3   |             | 3   | %    |
|                             | $E_{TOT(HT)}$ | Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$  | -2   |             | 2   | %    |
|                             | $E_{TOT(LT)}$ | Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$ |      | $\pm 3$     |     | %    |

## Package Information

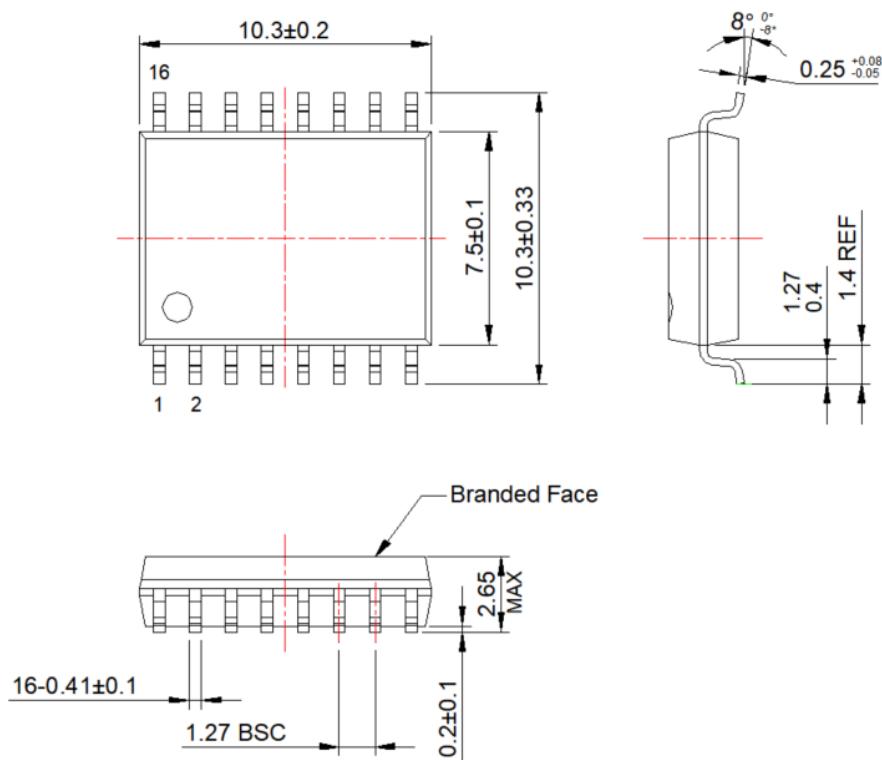

## Performances Parameters Definitions

- **Quiescent Voltage Output (QVO):**

In the quiescent state (no significant magnetic field, B=0G), Current Sensor Output Voltage  $V_{QVO}$

-xR:  $V_{QVO}$  has a constant ratio to the supplyvoltage;

$$V_{QVO} = V_{CC}/2 \text{ or } V_{QVO} = V_{CC}/10$$

- **Sensitivity(Sens):**

Sens is the slope of the reference output line ;  $V_{OUT} = V_{QVO} + 2 \times I_P / I_{P\_MAX}$

which refers to the following, the change of current, the change of output, its relationship with current is :  $\text{Sens} = 2/I_{P\_MAX}$

- **Offset with Temperature:**

Due to internal component tolerances and thermal considerations, the Quiescent Voltage Output (QVO) may drift from its nominal value through the operating ambient temperature (TA).

- **Sensitivity with temperature:**

Due to the influence of internal temperature compensation coefficient, the sensitivity will change through the whole working temperature, and be different from the expected value at room temperature.

- **Magnetic Offset:**

In the primary side current by the maximum IP - > 0, caused by sensor magnetic core material hysteresis phenomenon, called zero magnetic disturbance on the output side of error voltage.

- **Offset voltage:**


The zero offset voltage is the output voltage when the primary current is zero, with ideal value:  $V_{QVO} = V_{CC}/2$  (or  $V_{CC}/10$ ). The difference between  $V_{QVO}$  and ideal value is named Total offset voltage error. This offset error can be attributed to the zero-point offset voltage (due to the ASIC internal QVO adjusted resolution), magnetic offset, temperature drift, and hysteresis.

- **Response Time :**

The time between the primary current signals (IPN) reaches 90% of its final value and when the sensor output signal reaches 90%. See figure1.

- **Rise time :**

The time between when the sensor output reaches 10% of its final value, and when it reaches 90% of its final value. See figure2.

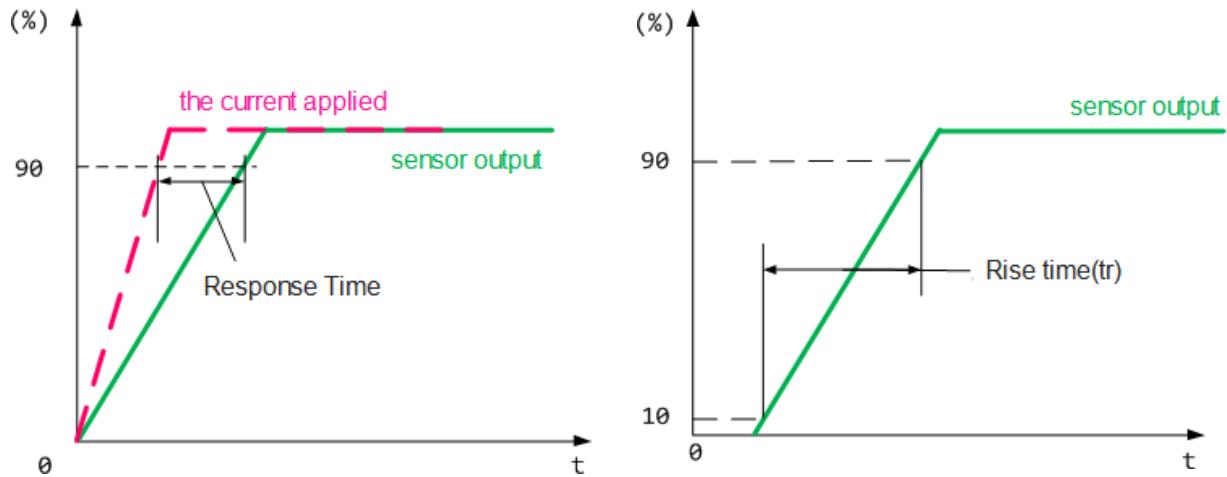


- **QVO Ratiometricity error :**

When the supply voltage  $V_{CC}$  changes from 5.0V to  $4.75 < V_{CC1} < 5.25$ V ,the deviation between the sensor zero output and the theoretical value, the formula is defined as follows:

$$Er = V_{QVO(V_{CC1})} - V_{QVO(5V)} \times (V_{CC1} / 5)$$

- **Linearity :**

The maximum Positive and Negative error comparing with ideal output line  
 (-BR mode:  $V_{OUT}=V_{CC}/2+2\times I_p/I_{P(MAX)}$  )

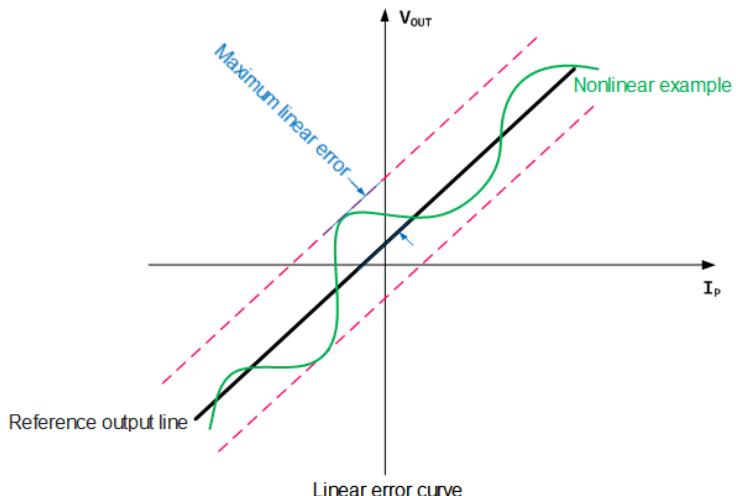

- **Total Output Error ETOT:**

Error between the device measurement current and Applied current ( $I_P$ ), which is defined as the difference between the ideal output voltage and the actual output voltage divided by the ideal sensitivity:

$$E_{TOT(I_P)} = \frac{V_{I_{OUT}(I_P)} - V_{I_{OUT(ideal)}(I_P)}}{Sens_{(ideal)} \times I_P}$$

$$V_{I_{OUT(ideal)}(I_P)} = V_{I_{OUT}(Q)} + (Sens_{(ideal)} \times I_P)$$

At relatively high currents,  $E_{TOT}$  is mainly due to sensitivity errors; while at relatively low currents,  $E_{TOT}$  is mainly due to offset voltage errors ( $V_{OE}$ ).

Actually, when the  $I_P$  approaches zero, the  $E_{TOT}$  approaches infinity due to offset voltage error.

**Important notes :**

1. Wrong wiring may cause sensor damage. After the sensor is connected to the 3.3V power supply, the measured current passes through the direction of the sensor current terminal, and the corresponding voltage value can be measured at the output end.
2. -BR:  $V_{OUT}$  is proportional to  $V_{CC}$ ,  $V_{OUT} = V_{CC}/2 + 2 \times \frac{I_P}{I_{P(MAX)}}$   
Supply voltage change will cause  $V_{OUT}$  change by ratio.  
For example:  $V_{CC}$  range 4.75V~5.25V;  $V_{QVO}$  output range at 2.375V~2.6255V .  
 $V_{OUT(IPMAX)}$  output range at 4.275V~4.725V.