

MH492, a linear Hall-effect sensor, is composed of Hall sensor, linear amplifier and Totem-Pole output stage. It features low noise output, which makes it unnecessary to use external filtering. It also can provide increased temperature stability and accuracy. The linear Hall sensor has a wide operating temperature range of -40°C to +105°C, appropriate for commercial, consumer, and industrial environments.

The high sensitivity of Hall-effect sensor accurately tracks extremely weak changes in magnetic flux density. The linear sourcing output voltage is set by the supply voltage and in proportion of vary of the magnetic flux density. Typical operation current is 2.5 mA and operating voltage range is 2.8 volts to 6.0 volts. Trim version is available for an ultra low offset products.

The three package styles available provide magnetically optimized solutions for most applications. Package types SO is an SOT-23(1.1 mm nominal height),SQ is an QFN2020-3(0.5 mm nominal height),a miniature low-profile surface-mount package, while package UA is a three-lead ultra-mini SIP for through-hole mounting.

Features and Benefits

- Operating Voltage Range: 2.8V~6.0V
- Power consumption of 3.3mA at 5 V_{DC} for energy efficiency
- Low-Noise Operation
- Linear output for circuit design flexibility
- Totem-Pole for a stable and accurate output
- Responds to either positive or negative gauss
- Magnetically Optimized Package for UA
- Small package for SMD
- Trim version is precise on offset
- Robust ESD performance
- RoHS compliant 2011/65/EU and Halogen Free

Applications


- Current sensing
- Motor control
- Position sensing
- Magnetic code reading
- Rotary encoder
- Ferrous metal detector
- Vibration sensing
- Liquid level sensing
- Weight sensing

Ordering Information

 Sorting Code Package type Temperature Code Part number Company Name and product Category	Company Name and Product Category MH:MST Hall Effect/MP:MST Power IC Part number 181,D182,183,184,185,248,477,D381,D381F,381R,D382..... If part # is just 3 digits, the forth digit will be omitted. Temperature range E: 85 °C, I: 105 °C, K: 125 °C, L: 150 °C Package type UA:TO-92S,VK:TO-92S(4pin),VF:TO-92S(5pin),SO:SOT-23, SQ:QFN-3,ST:TSOT-23,SN:SOT-553,SF:SOT-89(5pin), SS:TSOT-26,SD:DFN-6,SG:SOT-89(3pin) Sorting α,β,Blank.....
---	---

Part No.	Temperature Suffix	Package Type
MH492IUA-A	I (-40°C to +105°C)	UA (TO92-3L)
MH492IUA-B	I (-40°C to +105°C)	UA (TO92-3L)
MH492ISQ-A	I (-40°C to +105°C)	SQ (QFN2020-3)
MH492ISQ-B	I (-40°C to +105°C)	SQ (QFN2020-3)
MH492ISO-A	I (-40°C to +105°C)	SO(SOT-23)
MH492ISO-B	I (-40°C to +105°C)	SO(SOT-23)
MH492IUA-A-T	I (-40°C to +105°C)	SO(SOT-23)
MH492IUA-B-T	I (-40°C to +105°C)	UA (TO92-3L)
MH492ISQ-A-T	I (-40°C to +105°C)	UA (TO92-3L)
MH492ISQ-B-T	I (-40°C to +105°C)	UA (TO92-3L)
MH492ISO-A-T	I (-40°C to +105°C)	UA (TO92-3L)
MH492ISO-B-T	I (-40°C to +105°C)	SQ (QFN2020-3)

Functional Diagram

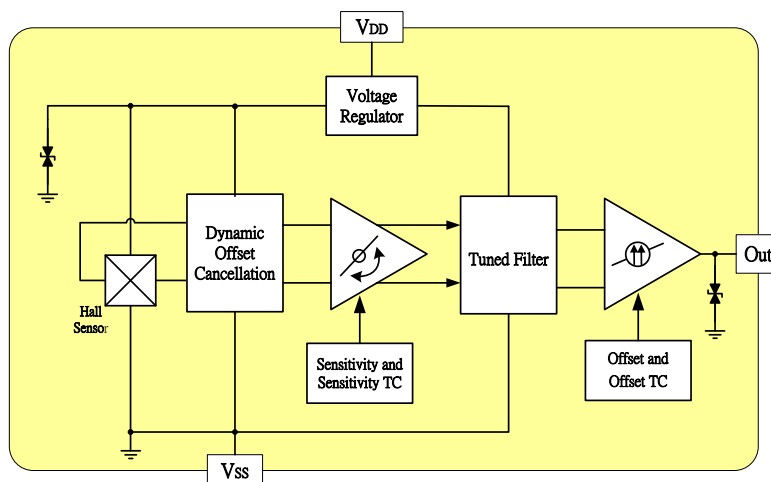

Absolute Maximum Ratings At ($T_a=25^{\circ}\text{C}$)

Characteristics		Values	Unit
Supply Voltage (V_{DD})		8	V
Reverse Voltage, (V_{DDR})		-0.5	V
Output Voltage, (V_{out})		8	V
Output current, (I_{out})		5	mA
Operating Temperature Range, (T_A)		-40 ~ +125	$^{\circ}\text{C}$
Storage temperature Range, (T_s)		-65 ~ +150	$^{\circ}\text{C}$
Thermal Resistance	(θ_{JA}) UA/SO/SQ	206/543/543	$^{\circ}\text{C/W}$
	(θ_{JC}) UA/SO/SQ	148/410/410	$^{\circ}\text{C/W}$
Package Power Dissipation, (P_D)		606/230/230	mW

Note: Do not apply reverse voltage to V_{DD} and V_{OUT} Pin, It may be caused for Miss function or damaged device.


Electrical Specifications

DC Operating Parameters : $T_A=+25^{\circ}\text{C}$, $V_{CC}=5.0\text{V}$

Parameters	Test Conditions		Min	Typ	Max	Units
Supply Voltage, (V_{DD})	Operating		2.8		6.0	V
Supply Current, (I_{DD})	B= 0 Gauss			3.3	5.0	mA
Output Current, (I_O)	$V_{DD} > 3\text{V}$		1.0	1.5		mA
Null Output Voltage, (V_{NULL})	A	B= 0 Gauss, (T Type)	2.35 (2.45)	2.5	2.65 (2.55)	V
	B	B= 0 Gauss, (T Type)	2.325 (2.400)	2.5	2.675 (2.600)	
High Output Voltage, (V_{OH})	B> Max Magnetic Gauss			4.9	4.99	V
Low Output Voltage, (V_{OL})	B> Min Magnetic Gauss		0.01	0.1		V
Output Voltage Span, (V_{OS})				4.8		V
Output Referred Noise, (V_{ON})	$T_a=25^{\circ}\text{C}$, output open			20		mV
Power-On Time, (T_P)					100	μS
Output Switch Time, (T_{SW})					150	μS
Output Switch Frequency, (F_{SW})			3			kHz
Magnetic Range Gauss	A		± 480			Gauss
	B		± 266			Gauss
Ratiometry Null output error, (R_{VON})	Operating voltage range relative to 5V			± 1.5		%
Ratiometry Sensitivity error, (R_{SEN})	Operating voltage range relative to 5V			± 1.5		%
Linearity, (LIN)	% of Span			± 1.5		%
Sensitivity	A	Standard, (T type)	4.6 (4.75)	5.0	5.4 (5.25)	mV/G
	B	Standard, (T type)	8.28 (8.55)	9.0	9.72 (9.45)	mV/G
Sensitivity Temperature Coefficient, (TC_{Sens})	$T_a=105^{\circ}\text{C}$, relative to Sens@ 25°C			± 0.1		%/ $^{\circ}\text{C}$
Delta null voltage, (ΔV_{ON})	$T_a=105^{\circ}\text{C}$, relative to V_{ON} @ 25°C			20		mV


Electro-Static Discharge	HBM	4			KV
--------------------------	-----	---	--	--	----

Typical application circuit

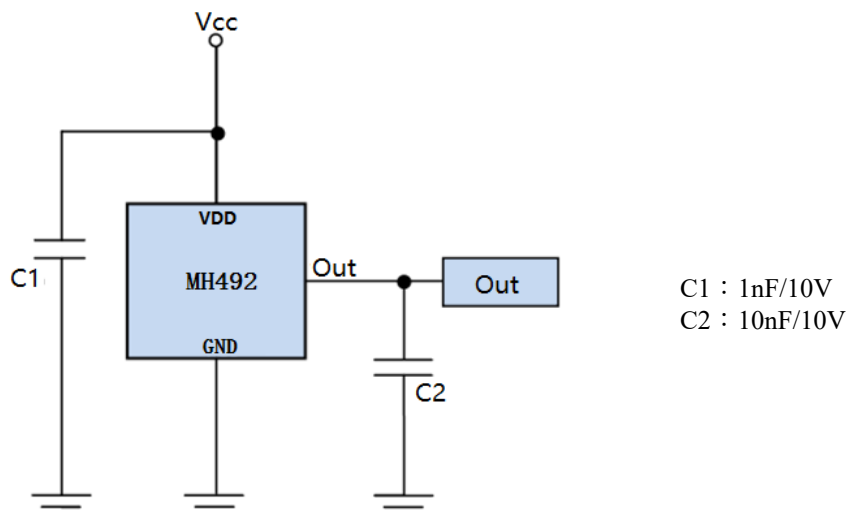

Sensor Location, Package Dimension and Marking


UA package

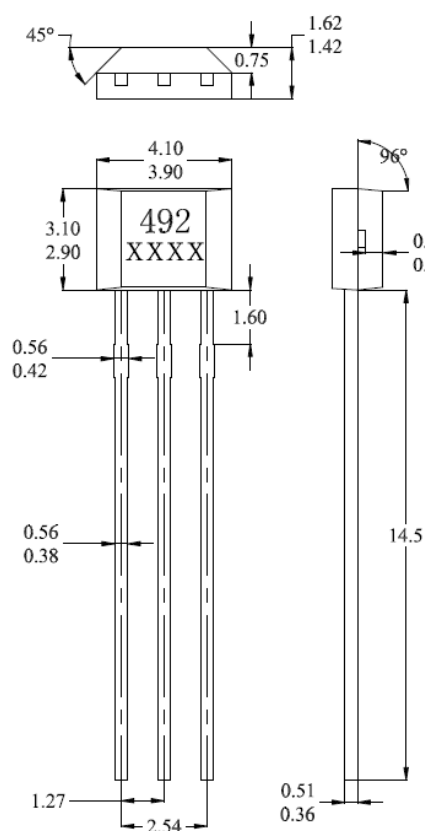


NOTES:

- Controlling dimension: mm
- Leads must be free of flash and plating voids
- Do not bend leads within 1 mm of lead to package interface.
- PINOUT:
Pin 1 VCC
Pin 2 GND
Pin 3 Output
- XXXX, 1st X = A/B
2nd -4th X=Date Code


Hall Chip location




Output Pin Assignment (Top view)




SQ Package

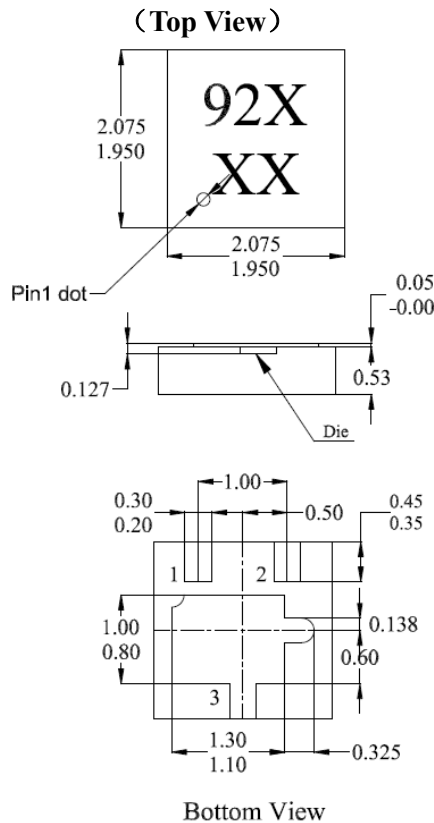

Hall Plate Chip Location

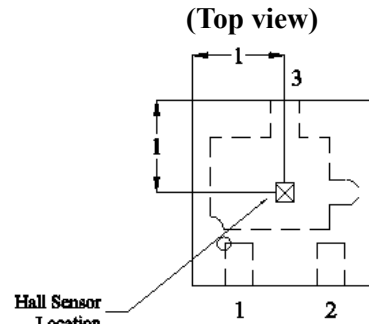


(For reference only) Land Pattern

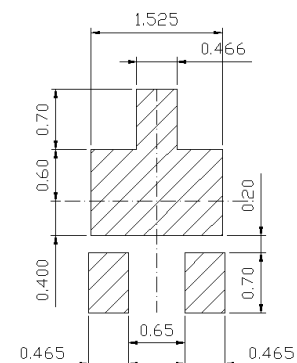

NOTES:


1. PINOUT (See Top View at left)
Pin 1 VDD
Pin 2 Output
Pin 3 GND
2. Controlling dimension: mm;
3. Chip rubbing will be 10mil maximum;
4. Chip must be in PKG. center.
5. 92X, X=A/B
6. XX= Date code

SO Package

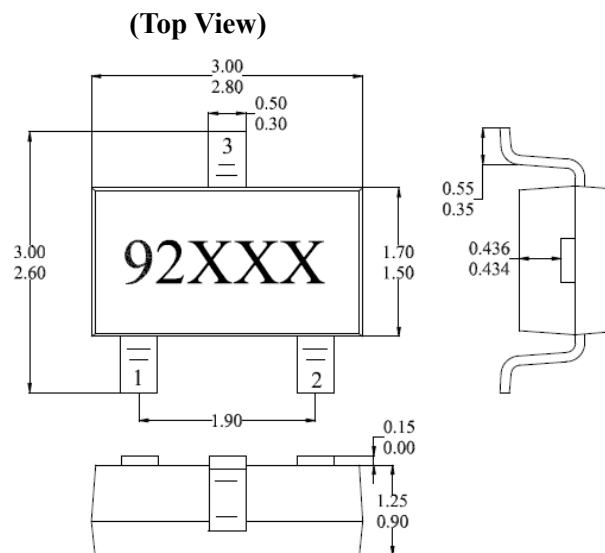


Hall Plate Chip Location

(Bottom view)

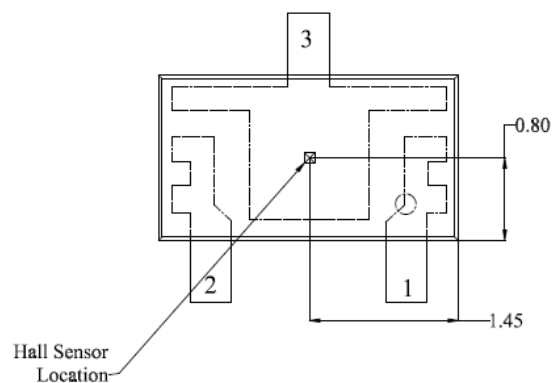

(For reference only) Land Pattern



NOTES:

1. Controlling dimension: mm
2. Lead thickness after solder plating will be 0.254mm maximum
3. Chip must be in PKG. center.
4. PINOUT (See Top View at left :)
Pin 1 V_{DD}; Pin 2 Output; Pin 3 GND
5. 92XXX, 1st X = A/B 2nd-3rd = Date Code