

MH272 Hall effect switch is a temperature stable, Superior high-temperature performance is made possible through a dynamic offset cancellation that utilizes chopper-stabilization.

MH272 includes the following on a single silicon chip: voltage regulator, Hall voltage generator, small-signal amplifier, chopper stabilization, Schmitt trigger, and open drain output. Advanced DMOS wafer fabrication processing is used to take advantage of low-voltage requirements, component matching, very low input-offset errors, and small component geometries.

This device requires the presence of omni-polar magnetic fields for operation.

MH272 is rated for operation between the ambient temperatures -40°C and $+85^{\circ}\text{C}$ for the E temperature range. and -40°C to 125°C for the K temperature range. The two package styles available provide magnetically optimized solutions for most applications. Package types SO is an SOT-23, a miniature low-profile surface-mount package, while package UA is a three-lead ultra-mini SIP for through-hole mounting.

The package type is in a Halogen Free version was verified by third party Lab.


Features and Benefits

- DMOS Hall IC Technology.
- Operation range from 2.5V to 26V .
- Omni polar, output switches with absolute value of North or South pole from magnet.
- Reverse bias protection on power supply pin.
- High Sensitivity for reed switch replacement applications.
- Low sensitivity drift in crossing of Temp range.
- High ESD Protection, HBM $\geq\pm 4\text{KV}(\text{min})$
- Output Current limit in 100mA.
- RoHS compliant 2011/65/EU and Halogen Free

Applications

- Solid state switch.
- Limit switch.
- Current limit.
- Interrupter.
- Magnet proximity sensor for reed switch replacement.


Ordering Information

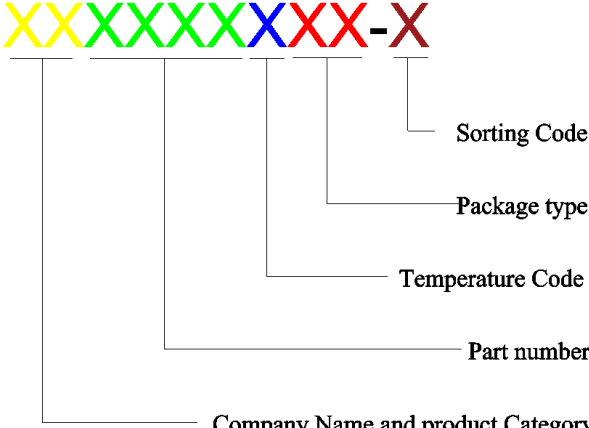 Company Name and product Category Part number Temperature Code Package type Sorting Code	Company Name and Product Category MH:MST Hall Effect/MP:MST Power MOSFET Part number 181,182,183,184,185,248,249,276,477,381,381F,381R,382..... If part # is just 3 digits, the forth digit will be omitted. Temperature range E: 85 °C, I: 105 °C, K: 125 °C, L: 150 °C Package type UA:TO-92S,VK:TO-92S(4pin),VF:TO-92S(5pin),SO:SOT-23, SQ:QFN-3,ST:TSOT-23,SN:SOT-553,SF:SOT-89(5pin) Sorting α, β, Blank.....
---	---

Part No.	Temperature Suffix	Package Type
MH272KUA	K (-40°C to + 125°C)	UA (TO-92S)
MH272EUA	E (-40°C to + 85°C)	UA (TO-92S)
MH272KSO	K (-40°C to + 125°C)	SO (SOT-23)
MH272ESO	E (-40°C to + 85°C)	SO (SOT-23)

KUA spec is using in industrial and automotive application. Special Hot Testing is utilized.

Functional Diagram

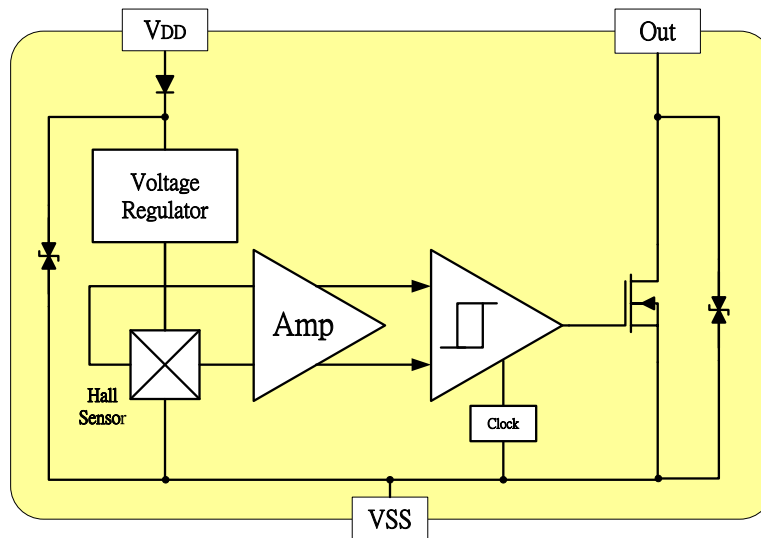

Absolute Maximum Ratings At ($T_a=25^{\circ}\text{C}$)

Characteristics		Values	Unit
Supply voltage, (V_{DD})		28	V
Output Voltage, (V_{out})		28	V
Reverse Voltage, (V_{DD} / V_{out})		-28/-0.3	V
Output current, (I_{SINK})		25	mA
Operating Temperature Range, (T_A)	"E" Class	-40 ~ +85	$^{\circ}\text{C}$
	"K" Class	-40 ~ +125	$^{\circ}\text{C}$
Storage temperature Range, (T_S)		-55 ~ +150	$^{\circ}\text{C}$
Maximum Junction Temp, (T_J)		150	$^{\circ}\text{C}$
Thermal Resistance	(θ_{JA}) UA/ SO	206 / 543	$^{\circ}\text{C}/\text{w}$
	(θ_{JC}) UA/ SO	148 / 410	$^{\circ}\text{C}/\text{w}$
Package Power Dissipation, (P_D)		606 / 230	mW


Note: Do not apply reverse voltage to V_{DD} and V_{OUT} Pin, It may be caused for Miss function or damaged device.

Electrical Specifications

DC Operating Parameters : $T_A=+25^{\circ}\text{C}$, $V_{DD}=12\text{V}$


Parameters	Test Conditions	Min	Typ	Max	Units
Supply Voltage, (V_{DD})	Operating	2.5		26.0	V
Supply Current, (I_{DD})	$B < B_{OP}$		2.5	3.5	mA
Output Saturation Voltage, ($V_{DS(on)}$)	$I_{out}=20\text{mA}, B > B_{OP}$		300	500	mV
Output Leakage Current, (I_{off})	$I_{OFF} B < B_{RP}$, $V_{OUT} = 12\text{V}$			10.0	μA
Output Limited Current, (I_{CO})	$B > B_{OP}$		100		mA
Power-On Time, (T_P)				100	μs
Output Switch Time, (T_{SW})				100	μs
Output Switch Frequency, (F_{SW})		5			kHz
Output Rise Time, (T_R)	$R_L=1\text{k}\Omega$, $C_L=20\text{pF}$		0.1	0.45	μs
Output Fall Time, (T_F)	$R_L=1\text{k}\Omega$; $C_L=20\text{pF}$		6.0	10	μs
Electro-Static Discharge	HBM	4			KV
Operate Point, $B_{OPS}(B_{OPN})$	$B > B_{OPS}(B < B_{OPN})$, V_{OUT} On	20(-40)	30(-30)	40(-20)	Gauss
Release Point, $B_{RPS}(B_{RPN})$	$B < B_{RPS}(B > B_{RPN})$, V_{OUT} Off	11(-36)	20(-20)	36(-11)	Gauss
Hysteresis, (B_{HYS})	$ B_{OP} - B_{RP} $		10		Gauss

Typical application circuit

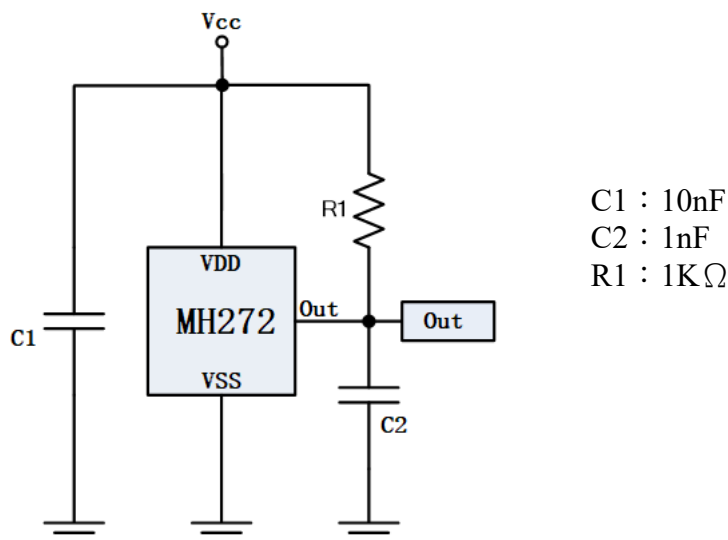

Sensor Location, Package Dimension and Marking

UA Package

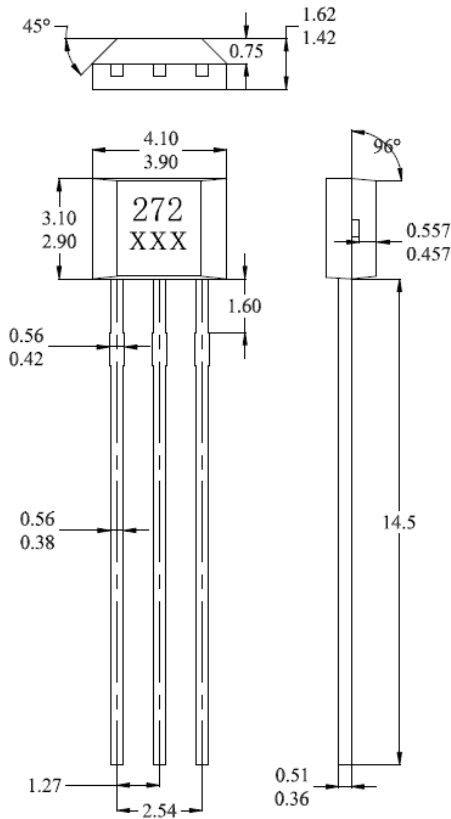


NOTES:


- 1).Controlling dimension: mm
- 2).Leads must be free of flash and plating voids
- 3).Do not bend leads within 1 mm of lead to package interface.
- 4).PINOUT:

Pin 1	VDD
Pin 2	GND
Pin 3	Output

Hall Chip location

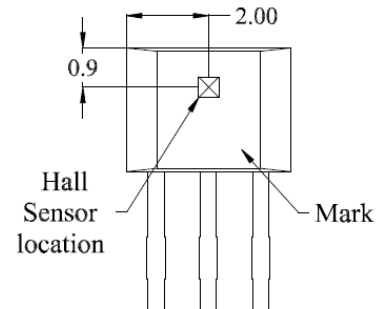


Output Pin Assignment (Top view)




Package (SOT-23)

(Top View)

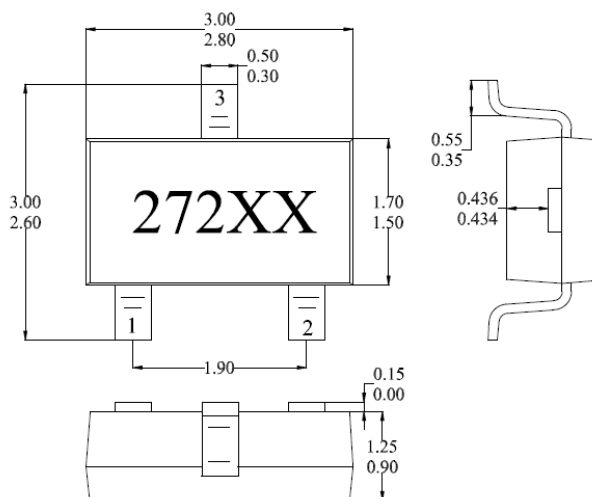


Hall Plate Chip Location

(Bottom view)

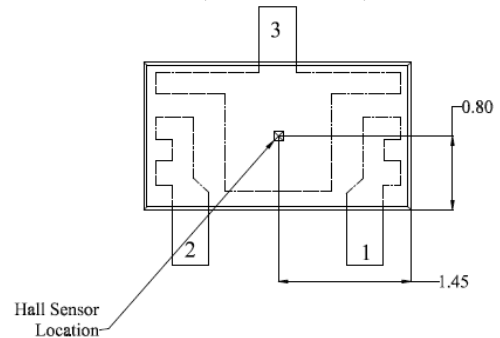

(For reference only)Land Pattern

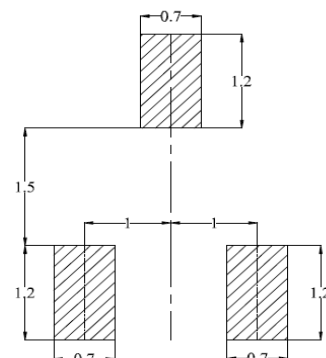

NOTES:

1. PINOUT (See Top View at left :)
Pin 1 V_{DD}; Pin 2 Output; Pin 3 GND
2. Controlling dimension: mm
3. Lead thickness after solder plating will be 0.254mm maximum